

Attorney's docket 21222

Box Patent Application
Commissioner of Patents and Trademarks
Washington, DC 20231

**CERTIFICATE OF EXPRESS OR
FIRST CLASS MAILING**

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail, or as Express Mail if the number of the Express Mail mailing label is provided below, in an envelope addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231, on **SEP 1 1999**

(Date of Deposit)

FL251122123
Express Mail Label Number

Signature

The Firm of Karl F. Ross, P.C.

NEW APPLICATION TRANSMITTAL

PATENT

Transmitted herewith for filing is the patent application of inventor:

	First Name	Last Name	Residence
1.	Waldemar	STEPHAN	

Citizenship

For (title):

**METHOD AND APPARATUS FOR CURRENT MEASUREMENT FOR
ELECTRONICALLY-CONTROLLED PUMP**

1. Type of Application

- ☒ Utility
- ☐ Design
- ☐ Plant

- ☒ Original
- ☐ Divisional
- ☐ Continuation
- ☐ Continuation-in-part

2. Benefit of Prior US Application(s) (35 USC 120) or foreign priority (35 USC 119)

- ☐ The new application being transmitted claims the benefit of a prior US application.
- ☒ Foreign priority claimed (see ¶9)

3. Papers Enclosed Required For Filing Date Under 37 CFR 1.53(b) (Uti.) or 37 CFR 1.153 (Des.)

- ☒ Pages of specification (9)
- ☒ Pages of claims (3)
- ☒ Pages of Abstract (1)
- ☒ Sheets of Drawing (3)
 - ☒ Formal
 - ☐ Informal

4. Additional papers enclosed

- ☐ Preliminary Amendment
- ☐ Information Disclosure Statement
- ☐ PTO-1449
- ☐ Citations (none)
- ☐ Declaration of Biological Deposit
- ☐ Submission of "Sequence Listing," computer-readable copy and/or amendment pertaining thereto for biotechnology invention containing nucleotide and/or amino-acid sequence
- ☐ Authorization of Attorney(s) to accept and follow instructions from Representative
- ☐ Other

5. Declaration or Oath

- ☐ Enclosed
original executed by
 - ☐ Inventor(s)
 - ☐ legal representative of inventor(s). 37 CFR 1.42 or 1.43
 - ☐ joint inventor or person showing a proprietary interest on behalf of inventor who refused to sign or could not be reached
 - ☐ this is the petition required by 37 CFR 1.47 and the statement required by 37 CFR 1.47 is also attached
- ☒ Not Enclosed
 - ☒ Application is made by a person authorized under 37 CFR 1.41(c) on behalf of all the above-named inventor(s).
 - ☐ Showing that the filing is authorized.

6. Inventorship Statement

The inventorship for all the claims in this application is:

- ☒ The same
- ☐ Not the same. An explanation, including the ownership of the various claims at the time the last claimed invention was made
 - ☐ is submitted.
 - ☐ will be submitted.

7. Language

- ☒ English
- ☐ non-English
- ☐ the attached translation is a verified translation. 37 CFR 1.52(d).

8. Assignment

- ☒ An assignment of the invention to WILO GmbH
 - ☐ is attached.
 - ☒ will follow.

9. Certified Copy

Certified copy of application

Country

Germany

Number

19840479.4

Date

4 September 1998

from which priority is claimed

- ☐ is(are) attached.
☒ will follow.

10. Fee calculation☒ **A. Utility application****CLAIMS AS FILED**

	No. Filed	Base No.	No. Extra	Rate	Basic fee
Total claims	11	20	0	\$18.00	\$760.00
Independent claims	2	3	0	\$78.00	\$0.00
Mult. dep. claims	No	n/a	n/a	\$260.00	\$0.00

- ☐ Amendment canceling extra claims enclosed.
☐ Amendment canceling multiply dependent claims enclosed.
☐ Fee for extra claims is not being paid at this time.

Filing Fee Calculation

\$760.00

- ☐ **B. Design application**
 (\$.00--37 CFR 1.16(f))

Filing fee calculation

\$00.00

- ☐ **C. Plant application**
 (\$490.00--37 CFR 1.16(g))

Filing fee calculation

\$00.00**11. Small Entity Statement(s)**

- ☐ Verified Statement(s) that this is a filing by a small entity under 37 CFR 1.9 and 1.27 is(are) attached

Filing fee calculation (50% of A, B, or C above)

12. Request for International-Type Search (37 CFR 1.104(d))

- ☐ Please prepare an international-type search report for this application at the time when national examination on the merits takes place.

13. Fee Payment

- ☒ Not enclosed.
- ☒ No filing fee is to be paid at this time.
- ☐ Enclosed.
- ☐ basic filing fee \$0.00
- ☐ petition fee for filing by other than all the inventors or person on behalf of the inventor where inventor refused to sign or could not be reached \$0.00
- ☐ for processing an application with a specification in a non-English language \$0.00
- ☐ processing and retention fee \$0.00
- ☐ fee for international-type search report \$0.00
- Total fees enclosed \$0.00**

14. Method of Payment of Fees

- ☐ Check in the amount of \$0.00
- ☐ Charge Account 18-2025 for \$0.00. A duplicate of this form is attached.

15. Authorization to Charge Additional Fees

- ☐ The Commissioner is hereby authorized to charge the following additional fees by this paper and during the entire pendency of this application to account 18-2025.
- ☐ 37 CFR 1.16(a), (f), or (g) (filing fees)
- ☐ 37 CFR 1.16(b), (c), or (d) (extra claims)
- ☐ 37 CFR 1.16(e) (surcharge for filing the basic filing fee and/or declaration on a date later than the filing date of the application)
- ☐ 37 CFR 1.17 (application processing fees)
- ☐ 37 CFR 1.18 (issue fee at or before mailing of Notice of Allowance pursuant to 37 CFR 1.31(b))

16. Instructions As To Overpayment

- ☐ credit account 18-2025
- ☐ refund

1 September 1999

The Firm of Karl F. Ross P.C.


 Herbert Dubno, reg. no. 19,752
Customer Number 000535

5676 Riverdale Avenue Box 900
 Riverdale (Bronx), NY 10471-0900
 Tel: (718) 884-6600
 Fax: (718) 601-1099
 je

**METHOD AND APPARATUS FOR CURRENT MEASUREMENT FOR ELECTRONICALLY-
CONTROLLED PUMP**

SPECIFICATION

FIELD OF THE INVENTION

5 My present invention relates to a determination of the
current draw of an electronically-controlled pump and to a pump
provided with such a current-draw measurement.

BACKGROUND OF THE INVENTION

10 Pumps, especially electronically-controlled centrifugal
pumps, can be driven by an electric motor having a motor control
circuit and supplied with power by a conventional power line.
The operation of the pump can be monitored, *inter alia*, by
measuring the current draw of the pump as a measure of the
loading of the motor and, therefore, the loading of the pump.
15 Other operating parameters can be monitored also for this and
other pump operation purposes.

20 If an increase of the current draw is detected, that
can represent an increased loading of the pump which may signal
an overload and require the pump to be shut down. The pump may
have an emergency shutdown circuit which can respond to that
overload or potential overload. It is also possible to use the
information, i.e. the current draw, for control of the pump speed
or for other purposes.

In the past it has been common to provide within the motor control circuit a resistor, usually connected between the power line and the input terminal of the motor, i.e. in the power part of the circuit, and to measure the voltage drop across this resistor as an indication of the current drawn by the power section and hence by the motor.

Such a measurement resistor has the drawback that it is an extra component which must be introduced at additional cost and must be mounted on the circuit board or the like in additional soldering steps. Since there is a continuing desire for simpler and inexpensive pumps, the provision of additional elements such as special measurement resistors and devices for tapping a voltage across such resistors, runs counter to the principle of simplification. Furthermore, special resistors as have been provided heretofore, contribute to power loss, undesirable heating of the electronic circuitry and, especially for continuously operating pumps, to significantly increase costs. The current which must be supplied is likewise increased and this can require the wiring for the pump to be more massive than is desirable.

OBJECTS OF THE INVENTION

It is, therefore, the principal object of the present invention to provide a method of determining the current draw of a pump which can provide both high accuracy and in a simple

manner, measurement of the current draw while nevertheless minimizing the operating and fabricating cost of the pump.

It is another object of the invention to provide an improved pump which can be fabricated relatively inexpensively and operated inexpensively but which will nevertheless allow measurement of the current draw.

A further object of this invention is to provide a method of and an apparatus for measuring the current draw of a pump without the drawbacks of earlier systems or with mitigation of such drawbacks so that, for example, power losses are minimized.

SUMMARY OF THE INVENTION

These objects are achieved, in accordance with the invention, in a method of determining a current draw of a pump driven by an electric motor having a power line and a motor-control circuit connected to the power line, the method comprising the steps of:

(a) measuring a voltage drop across at least a portion of a conductor having a definite resistance and connecting the power line with the motor-control circuit; and

(b) calculating the current draw from the voltage drop.

The pump assembly, according to the invention, can comprise:

an electric motor having a power line connected thereto for energizing the electric motor;

a motor control circuit connected to the motor and the power line for electronically controlling the pump assembly;

a pump driven by the motor; and

means for measuring a voltage drop across at least a portion of a conductor having a definite resistance and connecting the power line with the motor control circuit and calculating the current draw from the voltage drop.

According to the invention, therefore, a segment of a conductor between the control electronics, i.e. the motor control circuit, and the power line is used as the voltage drop segment and the voltage drop is detected across this segment and the output of the detector is converted into a measurement of the current. As a consequence it is not necessary to solder a separate component such as a measuring resistor into the pump and hence for the measurement of the current no additional fabricating costs are involved.

In small circulating pumps for heating purposes, this can amount to a saving of about 2% when, instead of the extra resistance, a segment of the connecting conductor, which is customarily provided, is used. It is, of course, self-understood that the resistance of the wire segment used for measurement should be known and hence defined. The use of the connecting conductor makes the separate incorporation of the measuring resistor superfluous and therefore simplifies fabrication as well.

The use of the connecting conductor segment has made the reliability of the measurement and thus the reliability of the pump greater since the system eliminates a separate component which can be an additional error source. The elimination of a measurement resistor, moreover, eliminates a component which can decrease the efficiency of the pump, give rise to undesired heating in the pump or in the electronic circuitry, and pose problems with respect to positioning, mounting and the like. The space required for electronic circuitry and hence the pump dimensions can be held low since the additional component is not required and that permits the pump to be used in limited environments. The invention is particularly advantageous for small pumps in circulating hot-water systems.

An especially precise current measurement is possible when a processor, especially a microprocessor or microcomputer, is incorporated in the motor control circuit and is used to detect the voltage drop over the segment of the connecting conductor. Such a microcomputer can calculate in an especially simple way the current drawn by the pump from the value of the current determined in the conductor segment. Furthermore, the microcomputer can permit factors which may influence the measurement of the current draw, such as the temperature of the conducting segment or the influence of the motor-control circuit on the current drop to be taken into consideration. The consideration of such factors is important since a relatively

small current in the motor-control circuit is used to indirectly provide a measurement to the much larger current draw.

It has been found to be especially advantageous to use a segment of the connecting conductor which itself has a well-defined resistance and can be composed from so-called resistance wire, namely, a wire having a predetermined specific resistance, this resistance wire can be cut to a predetermined length and used in the pump circuitry. Such resistance wires have within a temperature range an entirely predictable relationship between current flow and voltage drop so that the temperature characteristic of the wire segment can be programmed into the microcomputer as a data set or as a correction instruction for calculating the current.

In an especially advantageous embodiment the conductor is cold-soldered or bonded between a plug contact to which the power line is connected and the printed circuit board of the motor control circuit and can have a resistance of about 1-5 m Ω .

BRIEF DESCRIPTION OF THE DRAWING

The above and other objects, features, and advantages will become more readily apparent from the following description, reference being made to the accompanying drawing in which:

FIG. 1a is an elevational view of a circulating pump incorporating the invention;

FIG. 1b is a view similar to FIG. 1a of another embodiment of the circulating pump partly broken away;

FIG. 2 is a diagrammatic cross sectional view showing a bonded conductor;

FIG. 3 is a diagram illustrating the invention; and

FIG. 4 is a more detailed circuit diagram showing principles of the invention.

SPECIFIC DESCRIPTION

FIG. 1a shows a centrifugal pump 1 in the form of a hot-water circulating pump for a hot-water heating system which has an inlet 2, an outlet 3 and a pump housing 5 connected to the housing of a motor 4. The usual impeller or rotor of the pump is provided in the housing 5. The electric connection to the pump 1 is effected via a terminal box 6 which can include the motor control circuitry 8 (FIG. 3) and the connectors for the power supply, referred to here as the power circuit 7.

FIG. 1b shows a similar pump without the terminal box 6 but with a direct connection 18 between the power line and the motor housing 4. In this case, the motor control circuitry is provided in a compartment 19 attached axially to the motor housing and having a plug 20 for connection to the power line. In the housing 19 the electronic components 21 are provided on a ceramic support or printed circuit board 22 which has a wire segment 23 soldered to the plug 20 and the printed circuit board 22 and serving as the connecting segment between the power line and the motor control circuit.

The embodiment of FIG. 2 shows a section through the terminal box 6 which has a foot 9 mounting it to the motor housing. In the box 9 the printed circuit board 10 carries the motor control circuit and a plug contact 11 is provided in the power circuit running to the winding of the motor 4. Between the plug contact 11 and the terminal 12 of the printed circuit board 10, a wire segment 13 is provided with a bonded wire. The bonded wire 13 has in this case a resistance of 2-3 m Ω and is used for the current measurement.

The principle of the invention is shown in FIG. 3 where a power connector 14 has a power conductor 16 running to the power electronics 7 of the motor and a conductor segment 17a bridges the power section and the motor-control section 8. The segment 17a is connected via a line 17 supplying the motor-control circuit. The measurement resistance is here the segment 17a shown in broken lines.

More particularly, the power source can be seen with a line current 30 in FIG. 4 and can have a power line 31 connected to the power electronic circuitry shown in heavy lines in FIG. 4 and thus to the motor 32 driving the pump 33 and, in particular, to the motor windings. The power circuitry can include the rectifiers 34 forming a standard bridge and a thyristor 35 controlling the motor operation and connected via a resistor 36 to one side of the power line. A microcomputer 37 is bridged across the segment 38 of the conductor supplying the motor control circuitry 39 to detect the voltage drop thereacross and

provide a measurement of the current draw of the motor 32. That output may be used to cut off the operation of the motor in the case of an overload or as the basis of a display 40.

The motor-control circuitry can provide signals
5 operating the thyristor as a chopper for the sine wave input voltage and including the standard transistors 41 and 42 and bias resistors 43, 44 and 45. A diode 46 is provided between the anode of the thyristor 35 and the microprocessor. Apart from the use of the circuitry of FIG. 4 to detect the current draw, the
10 system is a conventional motor-control system. A temperature sensor such as a thermocouple can be provided at 47 to provide an input to the microprocessor for correction of the current measurement as a function of the temperature of the sensing segment 38 of the conductor connecting the power side of the
15 system to the motor-control circuit.

I CLAIM:

1 1. A method of determining a current draw of a pump
2 driven by an electric motor having a power line and a motor-
3 control circuit connected to said power line, said method
4 comprising the steps of:

5 (a) measuring a voltage drop across at least a portion
6 of a conductor having a definite resistance and connecting said
7 power line with said motor-control circuit; and

8 (b) calculating said current draw from said voltage
9 drop.

1 2. The method defined in claim 1 wherein said portion
2 of said conductor having said resistance is a piece of current
3 supply line connecting the power line with said motor-control
4 circuit.

1 3. The method defined in claim 1 wherein the voltage
2 drop is measured and the current draw is calculated from said
3 voltage drop by a computing unit forming part of said motor-
4 control circuit.

1 4. The method defined in claim 1 wherein a current
2 measured in said portion of said conductor is converted into a
3 current draw of said pump.

1 5. The method defined in claim 1 wherein in
2 calculating said current draw from said voltage drop, a computer
3 unit forming part of said motor control circuit compensates for a
4 temperature of said portion of said conductor.

1 6. An electronically controlled beam especially
2 comprising:
3 an electric motor having a power line connected thereto
4 for energizing said electric motor;
5 a motor control circuit connected to said motor and
6 said power line for electronically controlling said pump
7 assembly;
8 a pump driven by said motor; and
9 means for measuring a voltage drop across at least a
10 portion of a conductor having a definite resistance and
11 connecting said power line with said motor control circuit and
12 calculating said current draw from said voltage drop.

1 7. The assembly defined in claim 6 wherein said
2 portion of said conductor is a piece of resistance wire with a
3 known specific resistance and a defined length.

1 8. The assembly defined in claim 6 wherein said
2 portion of said conductor is a bridge between a plug contact to
3 which said power line is connected and a printed circuit board
4 carrying said motor control circuit, said bridge having a defined
5 resistance.

1 9. The assembly defined in claim 6 wherein said
2 resistance is between 1 and 5 mΩ.

1 10. The assembly defined in claim 6, further
2 comprising a processor forming part of said motor control circuit
3 and constituting the means for measuring and calculating.

1 11. The assembly defined in claim 10 wherein said
2 processor is provided to compensate for the temperature of said
3 portion of said conductor.

ABSTRACT OF THE DISCLOSURE

The current draw of a pump driven by an electric motor, especially a centrifugal pump such as a heating-system circulating pump, is measured by detecting the voltage drop across a conductor segment connecting the power side and hence the power line to the motor control circuit. This eliminates the need for a separate measurement resistor.

ef-

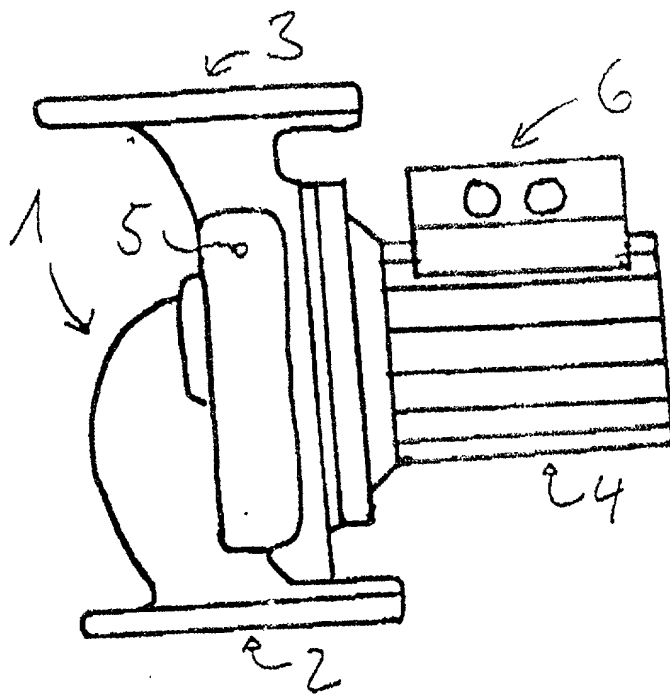


Fig. 1a

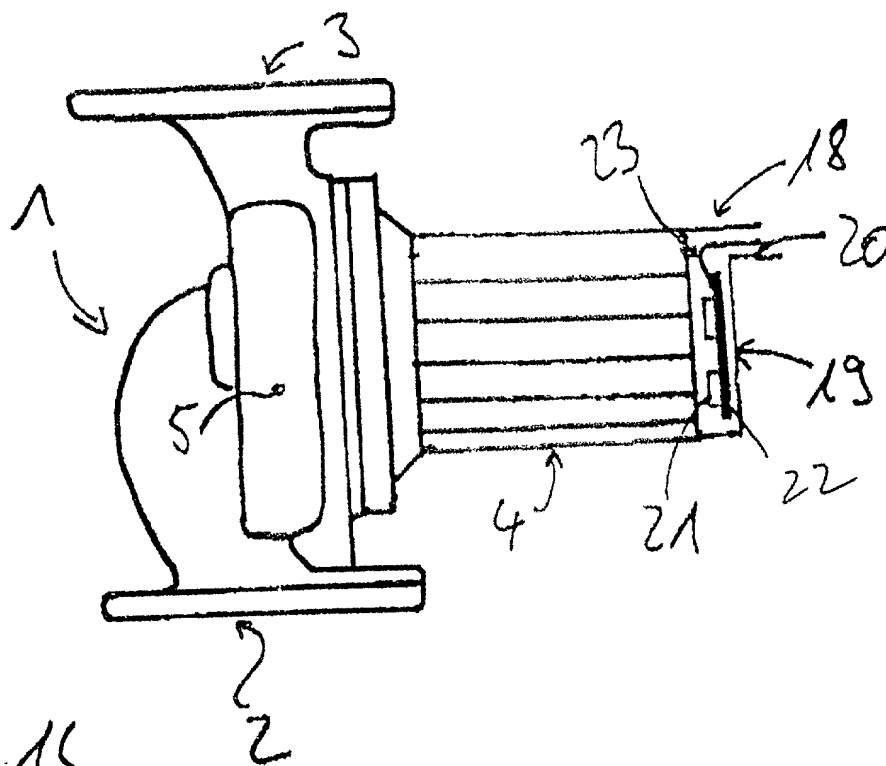


Fig. 1b

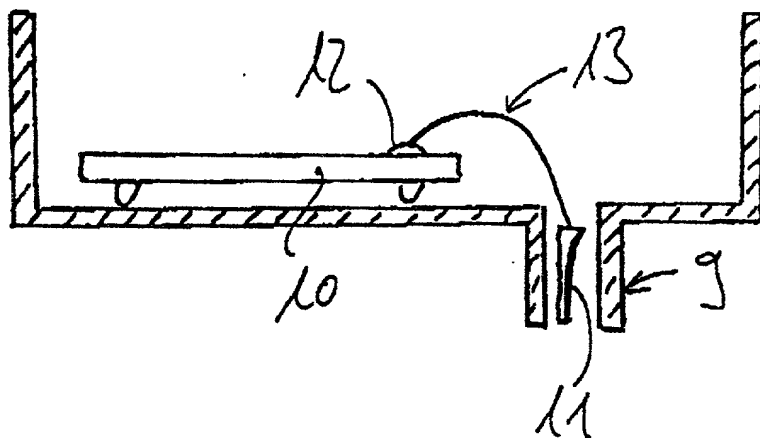


Fig. 2

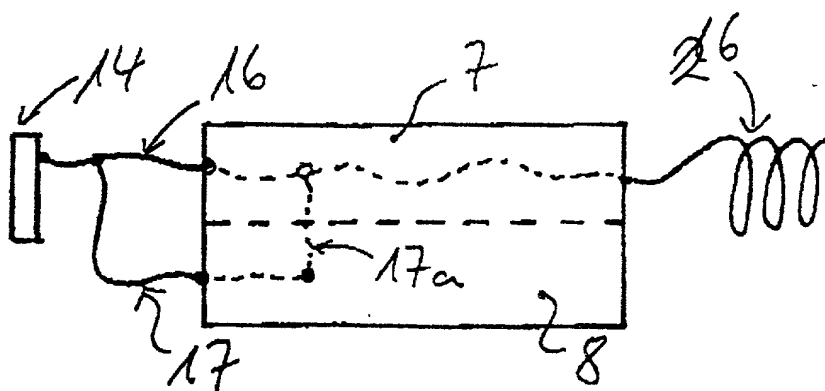


Fig. 3

